



CHONGQING CUMMINS ENGINE CO.,Ltd.
CHONGQING, P.R.CHINA, 400031
Marine Performance Curves

Basic Engine Model
N855-M

Curve Number:
M-888

Engine Configuration
D093348MX02

CPL Code:
CQ170


Date:
7-Jul-11

Displacement: **14.0 liter [857 in³]**
Bore: **140 mm [5.51 in]**
Stroke: **152 mm [5.98 in]**
Cylinders: **6**
Fuel System: **PT (CENTRY AND V.S.)**

Rated Power: **261 kw [350 bhp]**
Rated Speed: **1800 rpm**
Rating Type: **Continuous Duty**
Aspiration: **Turbocharged / LTA**

CERTIFIED: This diesel engine complies with or is certified to the following agencies requirements:

IMO Tier I NOx requirements of International Maritime Organization (IMO), MARPOL 73/78 Annex VI, Regulation 13

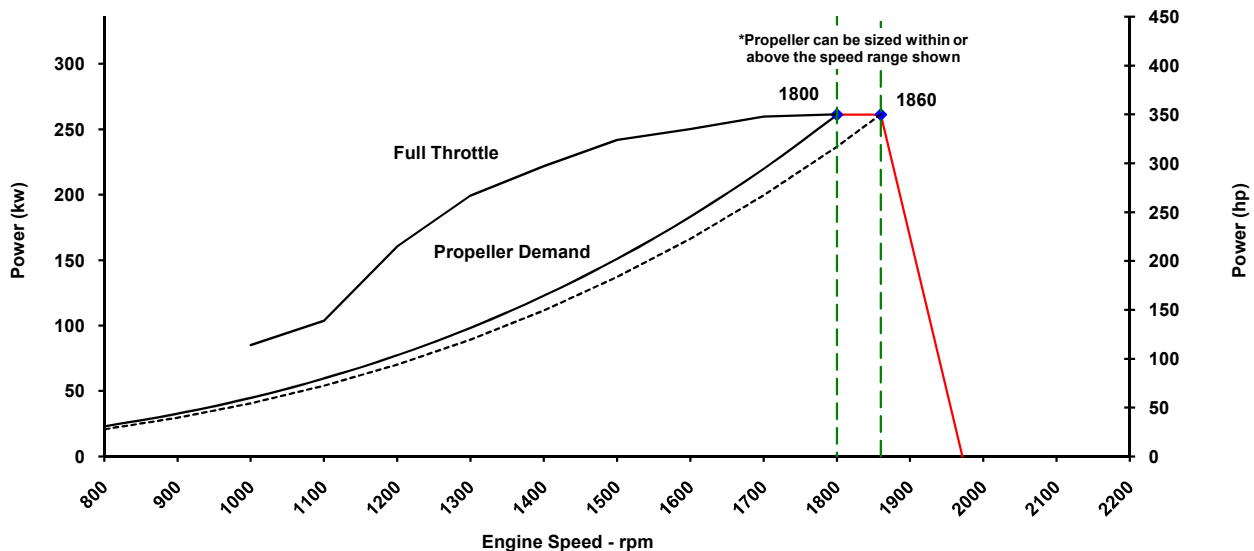

Speed	Full Throttle		Propeller Demand		Fuel Consumption	
	Power	Torque	Power	Torque		
rpm	kw (hp)	N·m (ft·lb)	kw (hp)	N·m (ft·lb)	L/hr	(gal/hr)
1860	261 (350)	1341 (1022)				
1800	261 (350)	1385 (1022)	261 (350.0)	1385 (1022)	68.9	(18.2)
1700	260 (348)	1458 (1075)	220 (294.8)	1235 (911)	59.4	(15.7)
1600	250 (335)	1493 (1101)	183 (245.8)	1094 (807)	48.8	(12.9)
1500	242 (324)	1537 (1134)	151 (202.5)	961 (709)	40.5	(10.7)
1400	221 (297)	1513 (1116)	123 (164.7)	838 (618)	33.3	(8.8)
1300	199 (267)	1461 (1078)	98 (131.9)	723 (533)	26.1	(6.9)
1200	160 (215)	1277 (942)	77 (103.7)	616 (454)	21.6	(5.7)
1100	104 (139)	902 (665)	60 (79.9)	517 (381)	17.4	(4.6)
1000	85 (114)	812 (599)	45 (60.0)	427 (315)		
900			33 (43.8)	346 (255)		
800			23 (30.7)	274 (202)		

*** Cummins Full Throttle Requirements:**

- Engine achieves or exceeds rated rpm at full throttle under any steady operating condition
- Engines in variable displacement boats (such as pushboats, tugboats, net dragners, etc.) achieve no less than 100 rpm below rated speed at full throttle during a dead push or bollard pull
- Engine achieves or exceeds rated rpm when accelerating from idle to full throttle

Rated Conditions: Ratings are based upon ISO 15550 reference conditions; air pressure of 100 kPa [29.612 in Hg], air temperature 25deg. C [77 deg. F] and 30% relative humidity. Member NMMA. Unless otherwise specified, tolerance on all values is +/-5%. Values from engine control modules and displayed on instrument panels are not absolute. Tolerance varies, but is generally less than +/-5% when operating within 30% of rated power.

Full Throttle curve represents power at the crankshaft for mature gross engine performance corrected in accordance with ISO 15550. Propeller Curve represents approximate power demand from a typical propeller. Propeller Shaft Power is approximately 3% less than rated crankshaft power after typical reverse/reduction gear losses and may vary depending on the type of gear or propulsion system used.

Fuel Consumption is based on fuel of 35 deg. API gravity at 16 deg C [60 deg. F] having LHV of 42,780 kJ/kg [18390 Btu/lb] and weighing 838.9 g/liter [7.001 lb/U.S. gal].

Continuous Rating (CON): Intended for continuous use in applications requiring uninterrupted service at full power. This rating is an ISO 15550 standard power rating.


CHIEF ENGINEER

Propulsion Marine Engine Performance Data

Curve No. M-888
DS : 4962
CPL : CQ170
DATE: 7-Jul-11

General Engine Data

Engine Model	N855-M
Rating Type	Continuous Duty
Rated Engine Power	261 [350]
Rated Engine Speed	1800
Rated Power Production Tolerance	3
Rated Engine Torque	1385 [1021]
Peak Engine Torque @ 1500 rpm	1523 [1123]
Brake Mean Effective Pressure	1239 [180]
Indicated Mean Effective Pressure	[N.A.]
Maximum Allowable Engine Speed	N.A.

Maximum Continuous Torque Capacity from Front of Crank Specifications

Maximum Torque Capacity from Front of Crank ²	[N.A.]
Compression Ratio	14.5:1
Piston Speed	9.1 [1795]
Firing Order	1-5-3-6-2-4

Weight (Dry) - Engine Only - Average	1302 [2870]
Weight (Dry) - Engine With Heat Exchanger System - Average	1441 [3177]
Weight Tolerance (Dry) Engine Only	12.2

Governor Settings

Default Droop Value	Refer to MAB 2.04.00-03/23/2006 for Droop explanation	6%
Maximum Droop Allowed		16%
High Speed Governor Break Point		1860
Minimum Idle Speed Setting		575
Normal Idle Speed Variation		±25
High Idle Speed Range Minimum		1860
Maximum		1972

Noise and Vibration

Average Noise Level - Top	(Idle)	dBa @ 1m	N.A.
	(Rated)	dBa @ 1m	N.A.
Average Noise Level - Right Side	(Idle)	dBa @ 1m	N.A.
	(Rated)	dBa @ 1m	N.A.
Average Noise Level - Left Side	(Idle)	dBa @ 1m	N.A.
	(Rated)	dBa @ 1m	N.A.
Average Noise Level - Front	(Idle)	dBa @ 1m	N.A.
	(Rated)	dBa @ 1m	N.A.

Fuel System¹

Avg. Fuel Consumption - ISO 8178 E3 Standard Test Cycle	l/hr [gal/hr]	47.7 [12.6]
Fuel Consumption at Rated Speed	l/hr [gal/hr]	68.9 [18.2]
Approximate Fuel Flow to Pump	l/hr [gal/hr]	204.4 [54.0]
Maximum Allowable Fuel Supply to Pump Temperature	°C [°F]	60.0 [140]
Approximate Fuel Flow Return to Tank	l/hr [gal/hr]	135.4 [35.8]
Approximate Fuel Return to Tank Temperature	°C [°F]	71.2 [160]
Maximum Heat Rejection to Drain Fuel	kW [Btu/min]	2.2 [123]
Fuel Pressure - Pump Out/Rail .. Mechanical Gauge	kPa [psi]	1048 [152]
INSITE Reading	kPa [psi]	N.A.

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.

² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

⁵ May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

CHONGQING CUMMINS ENGINE CO., Ltd.

CHONGQING, P.R.CHINA, 400031

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com/>

Propulsion Marine Engine Performance Data

Curve No. M-888
DS : 4962
CPL : CQ170
DATE: 7-Jul-11

Air System¹

Intake Manifold Pressure	kPa [in Hg]	129 [38]
Intake Air Flow	l/sec [cfm]	432 [915]
Heat Rejection to Ambient	kW [Btu/min]	16 [911]

Exhaust System¹

Exhaust Gas Flow	l/sec [cfm]	1074 [2,275]
Exhaust Gas Temperature (Turbine Out)	°C [°F]	424 [795]
Exhaust Gas Temperature (Manifold)	°C [°F]	520 [968]

Emissions (in accordance with ISO 8178 Cycle E3)

NOx (Oxides of Nitrogen)	g/kw-hr [g/hp-hr]	6.72 [5.01]
HC (Hydrocarbons)	g/kw-hr [g/hp-hr]	N.A.
CO (Carbon Monoxide)	g/kw-hr [g/hp-hr]	N.A.

Emissions (in accordance with ISO 8178 Cycle E2)

NOx (Oxides of Nitrogen)	g/kw-hr [g/hp-hr]	N.A.
HC (Hydrocarbons)	g/kw-hr [g/hp-hr]	N.A.
CO (Carbon Monoxide)	g/kw-hr [g/hp-hr]	N.A.

Cooling System¹

Sea Water Pump Specifications	MAB 0.08.17-07/16/2001	
Pressure Cap Rating (With Heat Exchanger Option)	kPa [psi]	48 [7]
Max. Pressure Drop Across Any External Cooling System Circuit	kPa [psi]	34 [5]

Engines with Low Temperature Aftercooling (LTA)

Main Engine Circuit

Coolant Flow to Main Cooler (with blocked open thermostat)	l/min [gal/min]	411 [109]
Standard Thermostat Operating Range	Start to open	77 [170]
	Full open	89 [192]
Heat Rejection to Engine Coolant ³	kW [Btu/min]	N.A.

Aftercooler (LTA) Circuit

Coolant Flow to LTA Cooler (with blocked open thermostat)	l/min [gal/min]	70 [19]
LTA Thermostat Operating Range	Start to open	57 [135]
	Full open	69 [156]
Heat Rejection to Engine Coolant ³	kW [Btu/min]	N.A.
Maximum Coolant Inlet Temperature from LTA Cooler	°C [°F]	63 [145]

TBD= To Be Determined

N/A = Not Applicable

N.A. = Not Available

¹ Unless otherwise specified, all data is at rated power conditions and can vary ± 5%.

² No rear loads can be applied when the FPTO is fully loaded. Max PTO torque is contingent on torsional analysis results for the specific drive system. Consult Installation Direction Booklet for Limitations.

³ Heat rejection to coolant values are based on 50% water/50% ethylene glycol mix and do NOT include fouling factors. If sourcing your own cooler, a service fouling factor should be applied according to the cooler manufacturer's recommendation.

⁴ Consult option notes for flow specifications of optional Cummins seawater pumps, if applicable.

⁵ May not be at rated load and speed. Maximum heat rejection may occur at other than rated conditions.

CHONGQING CUMMINS ENGINE CO.,Ltd.

CHONGQING, P.R.CHINA, 400031

All Data is Subject to Change Without Notice - Consult the following Cummins intranet site for most recent data:

<http://marine.cummins.com/>